



AIM FOR THE
NEXT LEVEL



reximex



Reximex produces world class products using the latest R&D and Manufacturing proficiency with the vision of never compromising from high quality and customer satisfaction.



INDEX

META	3 - 4
ZONE	5 - 6
THRONE GEN2	7 - 10
RPA	11 - 13
RP	14 - 16
DAYSTAR	17 - 20
TORMENTA	21 - 24
APEX	25 - 26
ACCURA	27 - 28
ACCESSORIES	29




reximex



r
reximex

META



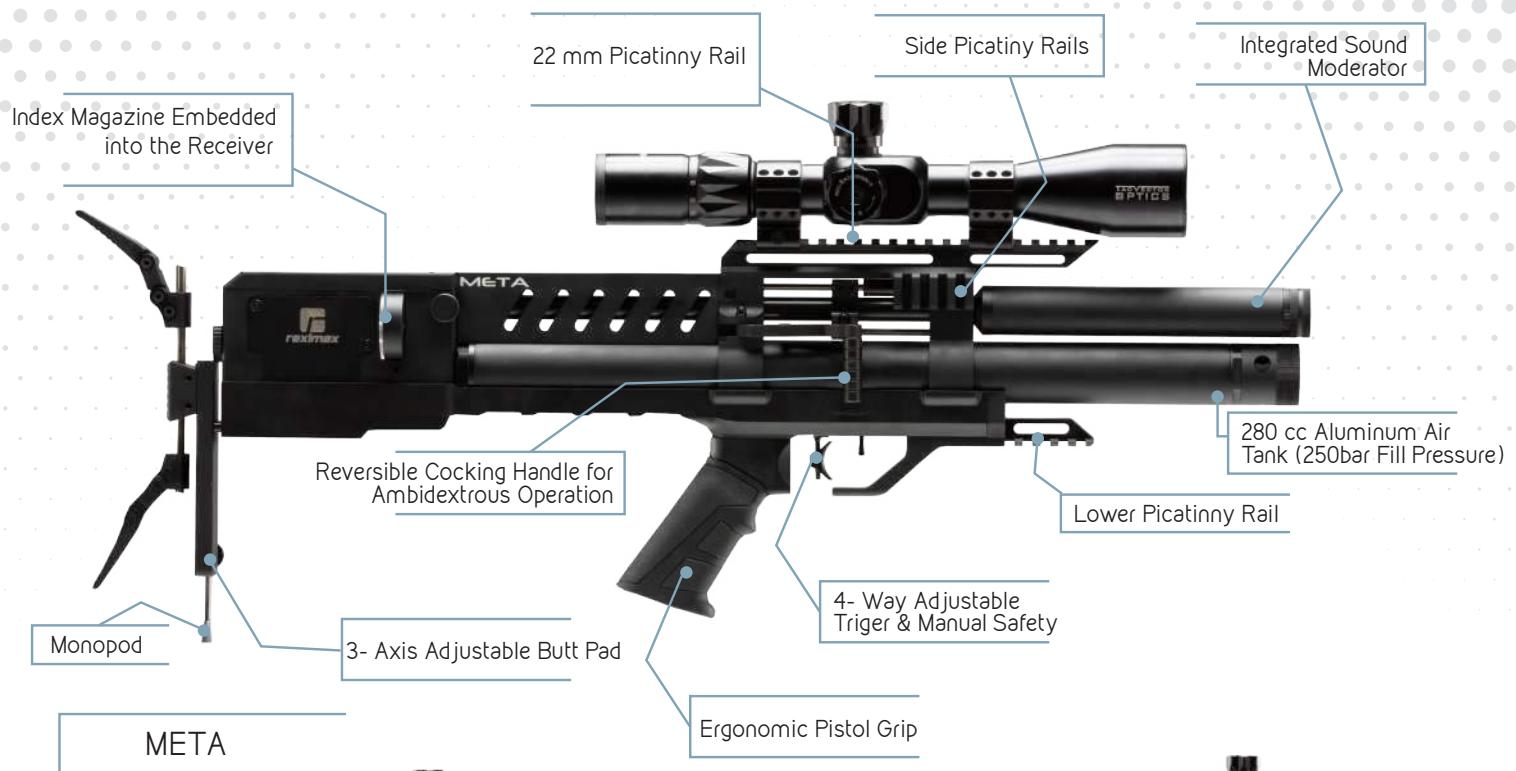

MODEL	
COCKING SYSTEM	
CALIBER	Side Lever
MAX. MUZZLE VELOCITY (*)	4.5 mm / .177cal 305 m/s (1000 fps)
ENERGY	Joules ft. lbs
MAGAZINE CAPACITY	25.4 18.7 14 140
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)	5.5 mm / .22 cal 275 m/s (900fps) 44.2 32.6 12 96 6.35mm / .25cal 255 m/s (800fps) 48.9 36.1 10 60
AIR TUBE VOLUME	280cc
FILL PRESSURE	250 BAR
STOCK	Bullpup Design High Quality Synthetic Stock. 3 - Axis Adjustable Butt Pad.
OVERALL LENGTH	700 mm (27.55")
BARELL LENGTH	380 mm (14.9")
WEIGHT	3 kg (6.6 lbs)
REGULATOR	Standard

META		
Side Lever	4.5 mm / .177cal 305 m/s (1000 fps)	5.5 mm / .22 cal 275 m/s (900fps)
	25.4	44.2
	18.7	32.6
	14	12
	140	96
		6.35mm / .25cal 255 m/s (800fps)
		48.9
		36.1
		10
		60
		280cc
		250 BAR
		Bullpup Design High Quality Synthetic Stock. 3 - Axis Adjustable Butt Pad.
		700 mm (27.55")
		380 mm (14.9")
		3 kg (6.6 lbs)
		Standard

* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

(Scope not included)




ZONE





reximex

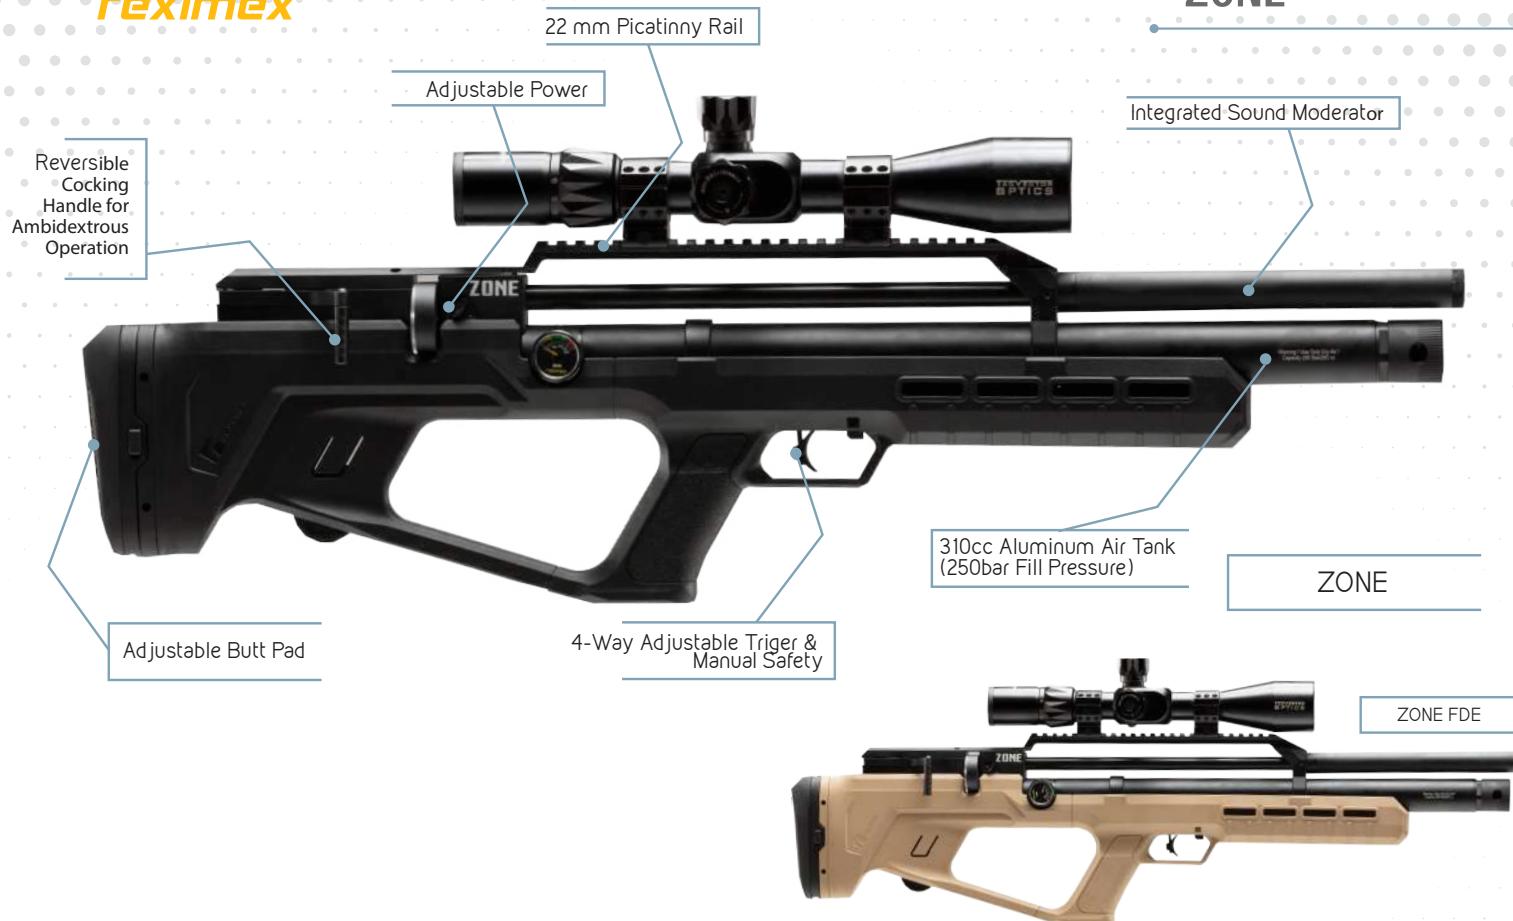

MODEL		ZONE		
COCKING SYSTEM		Side Lever		
CALIBER		4.5 mm / .177cal	5.5 mm / .22 cal	6.35mm / .25cal
MAX. MUZZLE VELOCITY (*)		332 m/s (1090 fps)	270 m/s (900fps)	255 m/s(840 fps)
ENERGY	Joules	30.2	42.3	53.9
	ft. lbs	22.3	312	39.76
MAGAZINE CAPACITY		14	12	10
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)		112	96	80
AIR TUBE VOLUME		310cc		
FILL PRESSURE		250 BAR		
STOCK	Bullpup Design High Quality Synthetic Stock. AxisAdjustable Butt Pad.			
OVERALL LENGTH		700 mm (29.5")		
BARELL LENGTH		380 mm (14.9")		
WEIGHT		3 kg (6.6 lbs)		
REGULATOR		Optional		

* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

(Scope not included)

Throne Gen2



reximex



MODEL	Throne Gen 2														
CALIBER	4.5 mm / .177cal	5.5 mm / .22 cal	6.35mm / 25cal												
MAX. MUZZLE VELOCITY (*)	310 m/s (1010fps)	275 m/s (900fps)	250 m/s (810fps)												
ENERGY	<table border="1"> <tr> <td>Joules</td><td>26</td></tr> <tr> <td>ft. lbs</td><td>19</td></tr> </table>	Joules	26	ft. lbs	19	<table border="1"> <tr> <td>Joules</td><td>44.2</td></tr> <tr> <td>ft. lbs</td><td>32.6</td></tr> </table>	Joules	44.2	ft. lbs	32.6	<table border="1"> <tr> <td>Joules</td><td>50.1</td></tr> <tr> <td>ft. lbs</td><td>37</td></tr> </table>	Joules	50.1	ft. lbs	37
Joules	26														
ft. lbs	19														
Joules	44.2														
ft. lbs	32.6														
Joules	50.1														
ft. lbs	37														
MAGAZINE CAPACITY	14	12	10												
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)	168	1209	80												
AIR TUBE VOLUME	425 cc aluminum (optional 480 cc carbon fiber tank)														
PRE - CHAMBER VOLUME	18 cc														
FILL PRESSURE	250 BAR														
STOCK	High Quality Synthetic Stock with Pistol Grip														
OVERALL LENGTH	850 mm (33.5")														
BARELL LENGTH	580 mm (22.8")														
WEIGHT	3.5 kg (7.7 lbs)														
REGULATOR	Externally Adjustable														

* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

(Scope not included)



9



Throne Gen2



Optional Carbon Tube



Ergonomic Safety

(Scope not included)



10

reximex

Throne Gen2

SKULL



G1



FLAT DARK EARTH CERAKOTE



(Scope not included)





reximex



Optional Sound
Moderator

RPA



Manual Safety



Regulator

MODEL	RPA	
COCKING SYSTEM	Side Lever	
CALIBER	4.5 mm / .177cal	5.5 mm / .22 cal
MAX. MUZZLE VELOCITY (*)	160 m/s (525fps)	145 m/s (475 fps)
ENERGY	Joules	
	7	12.3
	ft. lbs	
	5.2	9.1
MAGAZINE CAPACITY	9	7
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)	110	70
AIR TUBE VOLUME	50 cc aluminum (removable)	
FILL PRESSURE	250 BAR	
STOCK	Turkish Walnut Grip	
OVERALL LENGTH	330 mm (13")	
BARELL LENGTH	200 mm (7.9")	
WEIGHT	900 grams (1.98 lbs)	
REGULATOR	Standart	

* Velocity figures are tested with 8.44grain 177ca and 18.13grain 22cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

(Scope not included)




BLUE LAMINATED GRIP



ORANGE LAMINATED GRIP



GRAY LAMINATED GRIP

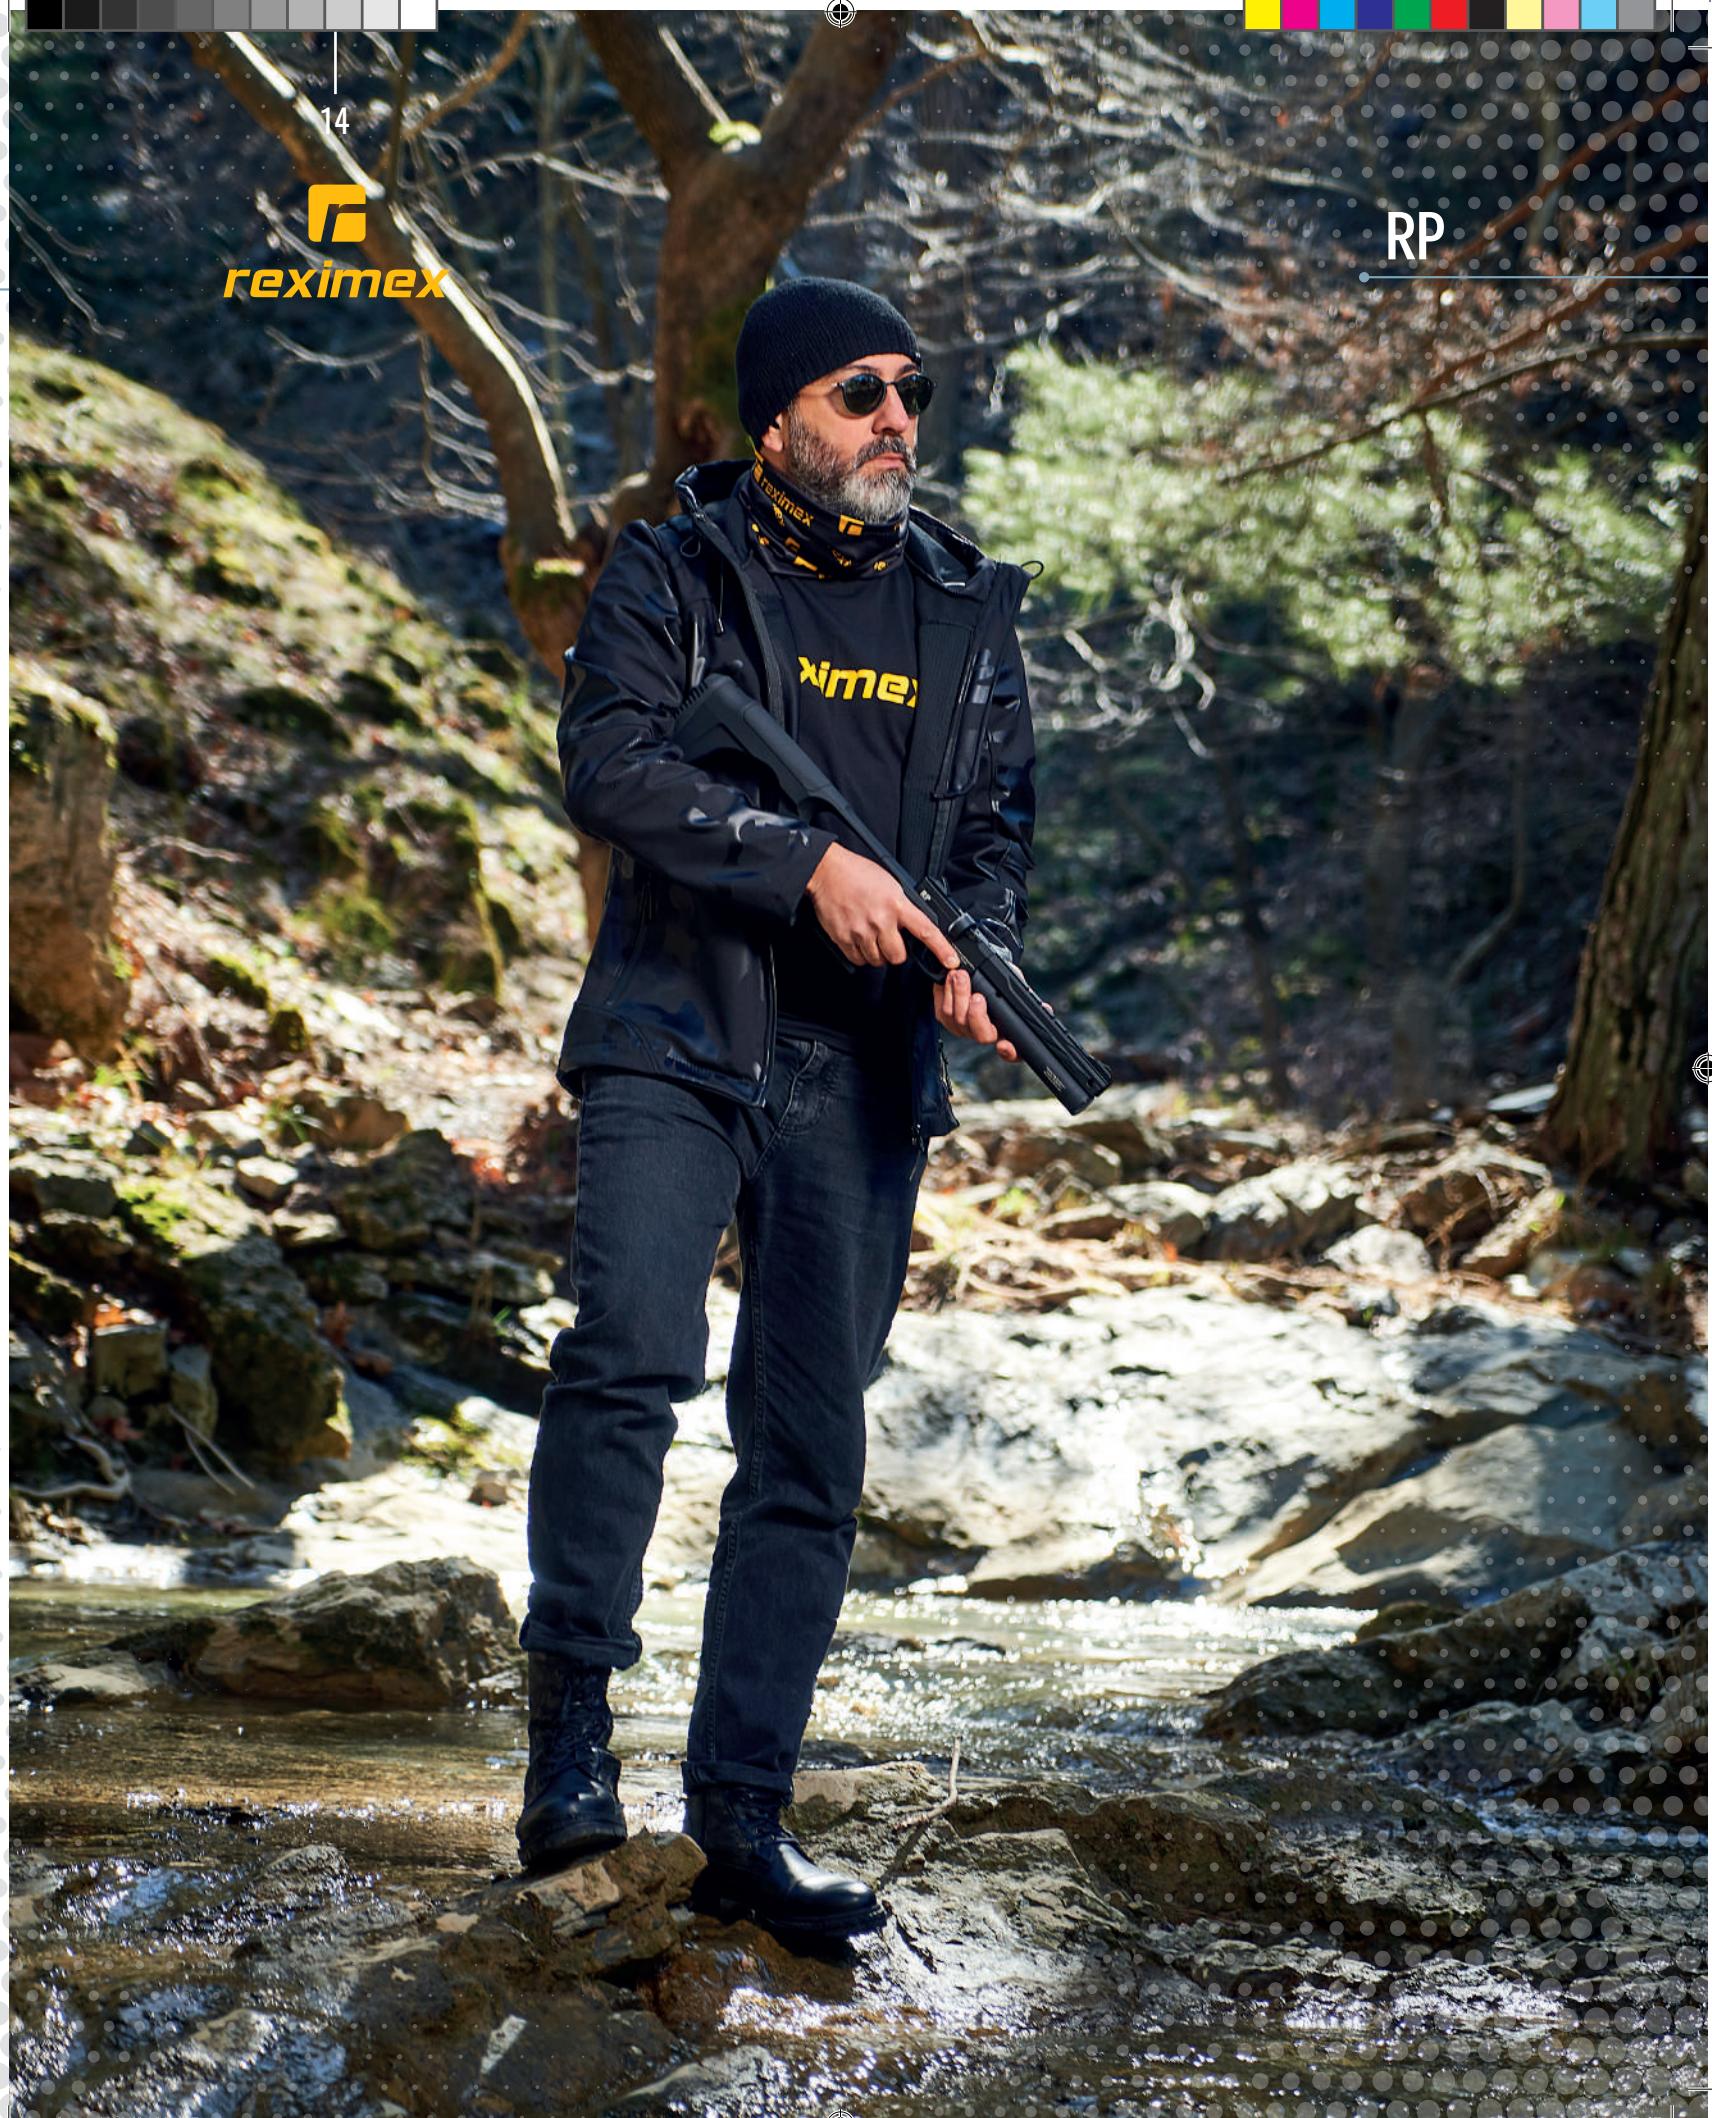



RP



MODEL	RP	
COCKING SYSTEM	Side Lever	
CALIBER	4.5 mm / .177cal	5.5 mm / .22 cal
MAX. MUZZLE VELOCITY (*)	160 m/s (525 fps)	145 m/s (475 fps)
ENERGY	Joules	ft. lbs
	7	12.3
	5.2	9.1
	9	7
	110	70
AIR TUBE VOLUME	50 cc aluminum (removable)	
FILL PRESSURE	250 BAR	
STOCK	Detachable Synthetic Stock	
OVERALL LENGTH	600 mm (23.6")	
BARELL LENGTH	200 mm (7.9")	
WEIGHT	900 grams (1.98 lbs) (1 kg with stock mounted)	
REGULATOR	Standart	

* Velocity figures are tested with 8.44grain 177ca and 18.13grain 22cal JSB pellets


* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



Standard Waterproof Textile Case



(Box content may vary between regions)

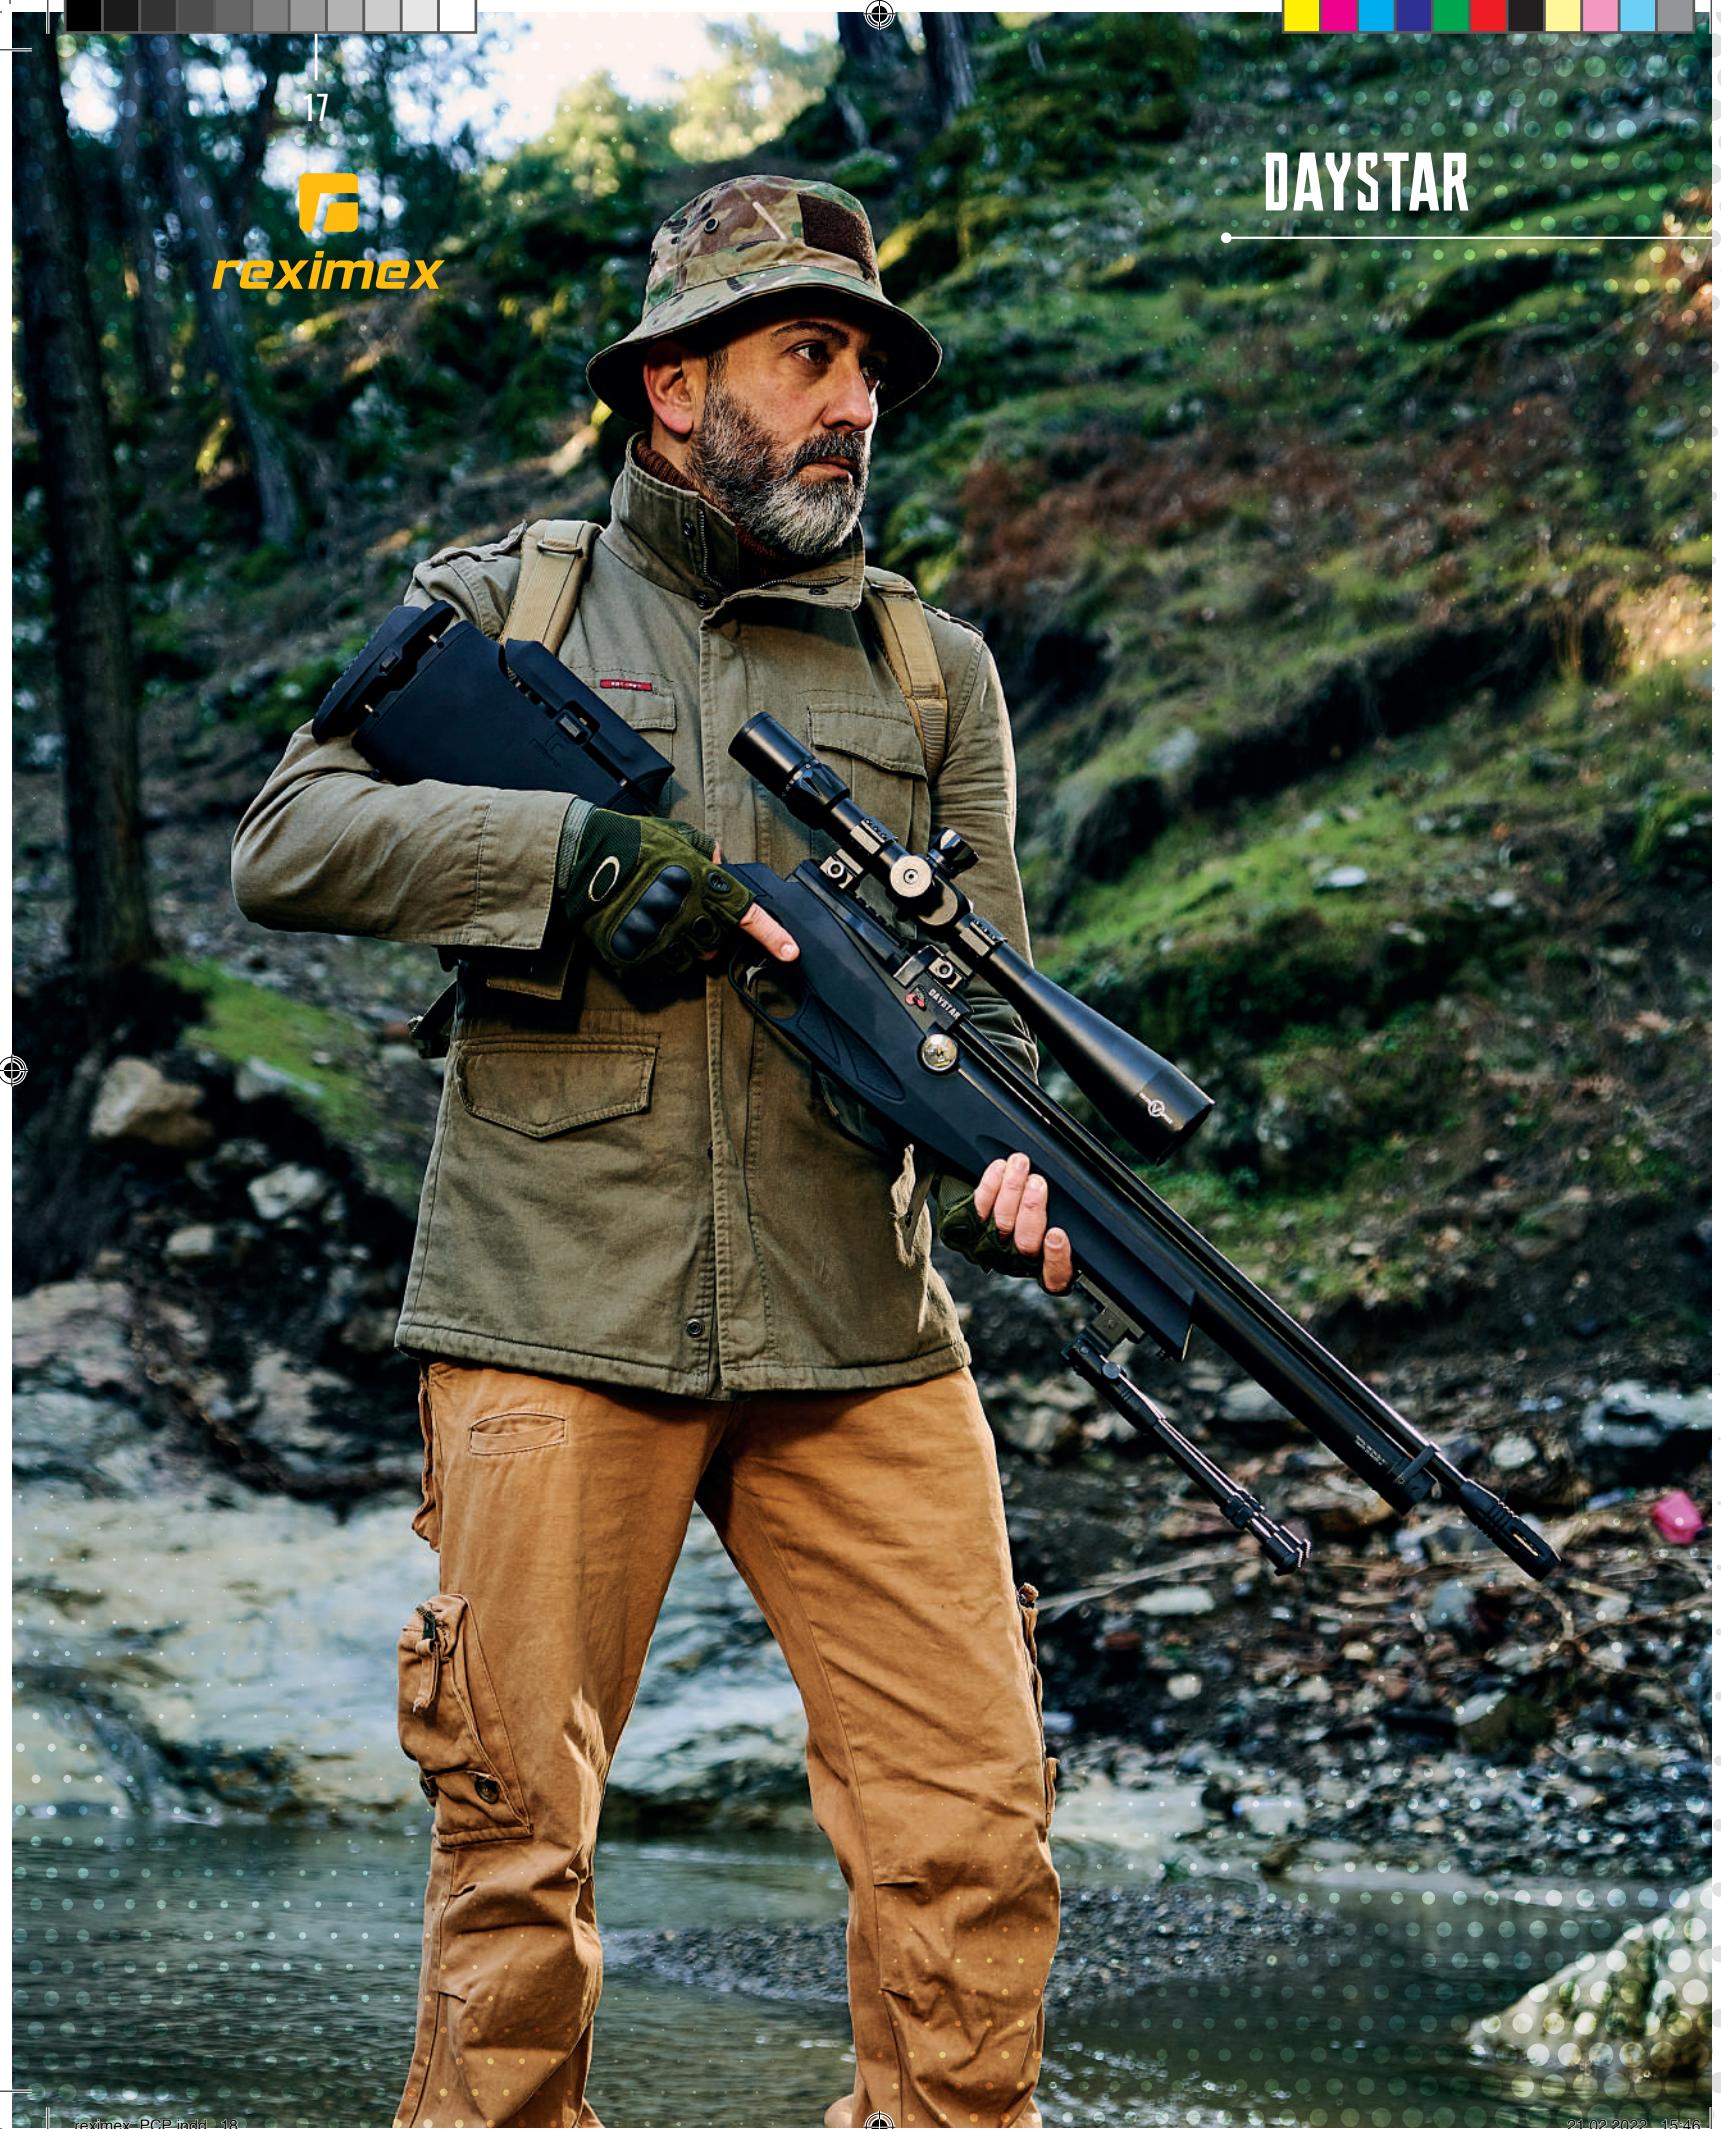



MODEL		DAYSTAR		
COCKING SYSTEM		Side Lever		
CALIBER		4.5 mm / .177cal	5.5 mm / .22 cal	6.35mm / .25cal
MAX. MUZZLE VELOCITY (*)		350 m/s (1150 fps)	290 m/s (950fps)	260 m/s (850fps)
ENERGY	Joules	33.6	49.3	55.2
	ft. lbs	24.8	36.3	40.7
MAGAZINE CAPACITY		14	12	10
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)		98	84	70
AIR TUBE VOLUME		260 cc		
FILL PRESSURE		250 BAR		
STOCK		High Quality Synthetic Stock Elevation Adjustable Cheek Rest. Adjustable Butt Pad.		
OVERALL LENGTH		1050 mm (41.3")		
BARELL LENGTH		580 mm (22.8")		
WEIGHT		2.8 kg (6.1 lbs)		
REGULATOR		Optional		

* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

(Scope not included)



19

**DAYSTAR**

Turkish Walnut



Turkish Walnut



Adjustable Power

(Scope not included)



20


reximex**DAYSTAR**

Wood Laminated



BLUE LAMINATED STOCK




GRAY LAMINATED STOCK



ORANGE LAMINATED STOCK

TORMENTA

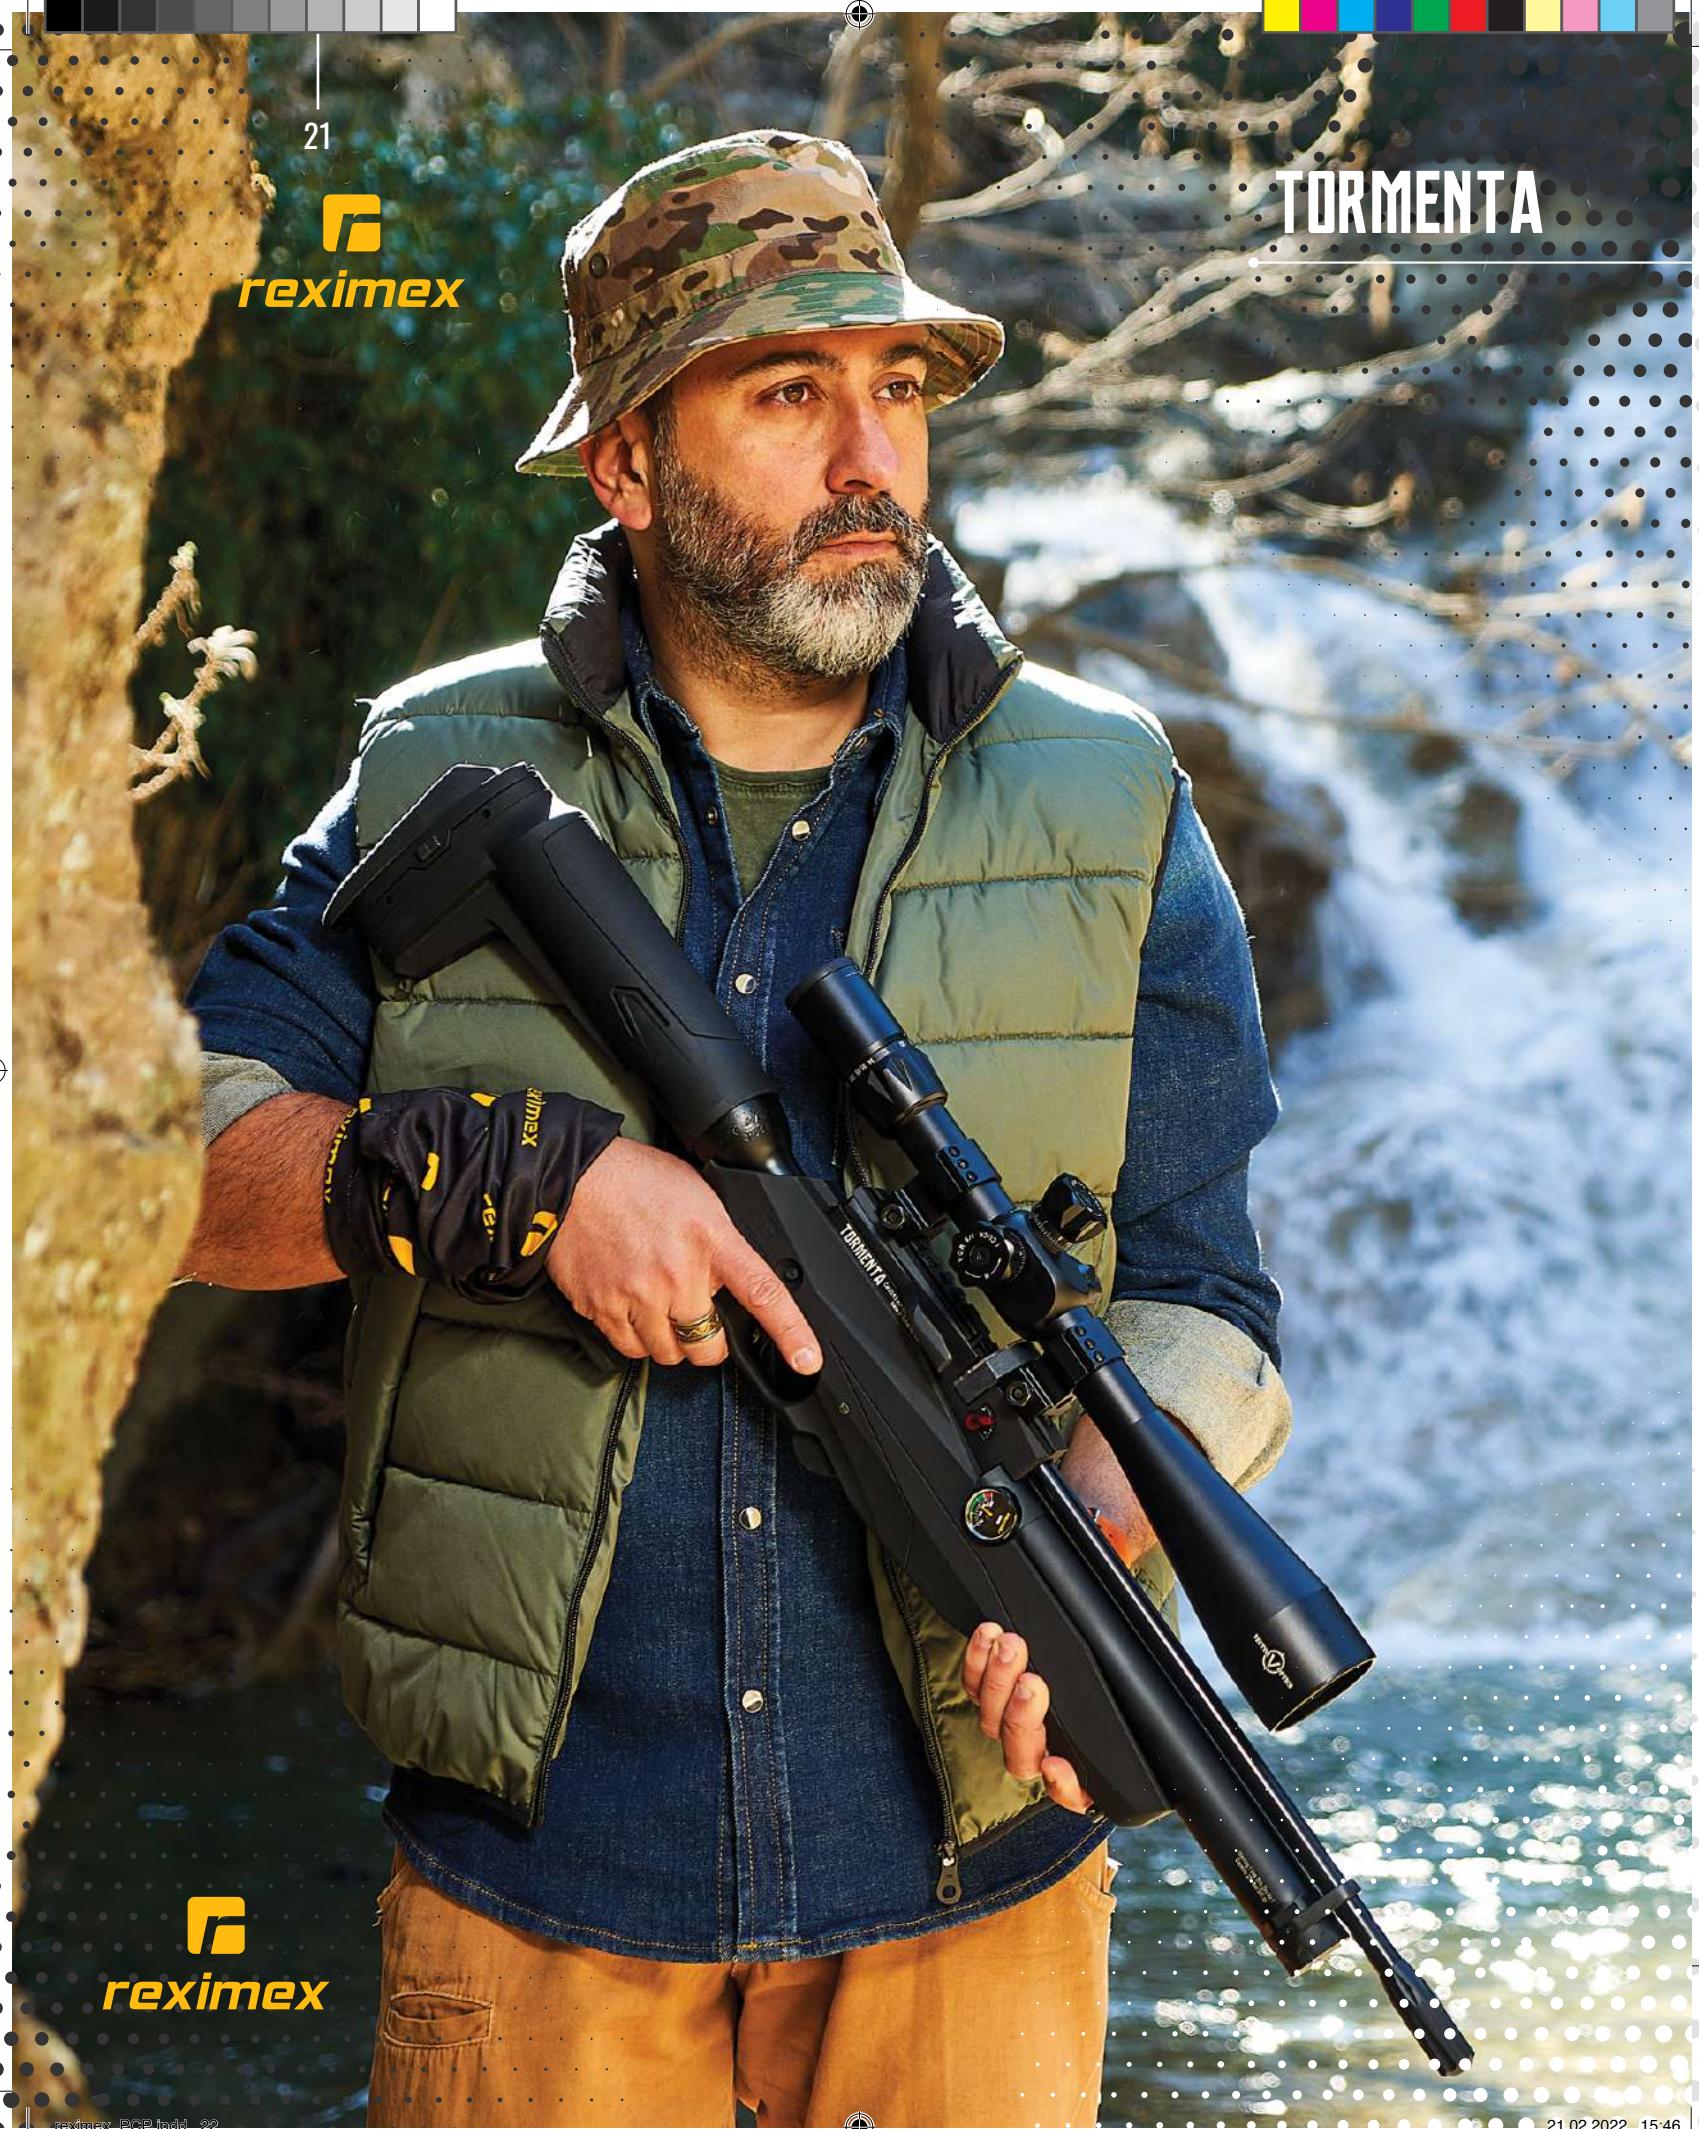

TORMENTA



MODEL		TORMENTA		
COCKING SYSTEM		Side Lever		
CALIBER		4.5 mm / .177cal	5.5 mm / .22 cal	6.35mm / .25cal
MAX. MUZZLE VELOCITY (*)		332 m/s (1090 fps)	270 m/s (880fps)	225 m/s (840 fps)
ENERGY	Joules	30.2	42.3	53.9
	ft. lbs	22.3	31.3	39.76
MAGAZINE CAPACITY		14	12	10
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)		126	108	90
AIR TUBE VOLUME		380 cc (250 cc rear bottle + 130 cc front cylinder)		
FILL PRESSURE		250 BAR		
STOCK		High Quality Synthetic Stock Adjustable Butt Pad.		
OVERALL LENGTH		850 mm (33.4")		
BARELL LENGTH		380 mm (14.9")		
WEIGHT		2.8 kg (6.1 lbs)		
REGULATOR		Optional		

* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

(Box content may vary between regions)

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

(Scope not included)

TORMENTA









MODEL		APEX					
COCKING SYSTEM		Side Lever					
CALIBER		4.5 mm / .177cal	5.5 mm / .22 cal	6.35mm / .25cal			
MAX. MUZZLE VELOCITY (*)		340 m/s (1110 fps)	270 m/s (880fps)	255 m/s (830fps)			
ENERGY	Joules	31.3	42.3	53.9			
	ft. lbs	23.1	31.2	39.8			
MAGAZINE CAPACITY		14	12	10			
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)		112	96	80			
AIR TUBE VOLUME		310cc					
FILL PRESSURE		250 BAR					
STOCK	Bullpup Design High Quality Synthetic Stock. Adjustable Butt Pad.						
OVERALL LENGTH	850 mm (29.5")						
BARELL LENGTH	480 mm (18.9")						
WEIGHT	3 kg (6.6 lbs)						
REGULATOR	Optional						

* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.

(Scope not included)





reximex



MODEL		ACCURA		
COCKING SYSTEM		Side Lever		
CALIBER		4.5 mm / .177cal	5.5 mm / .22 cal	6.35mm / .25cal
MAX. MUZZLE VELOCITY (*)		350 m/s (1110 fps)	290 m/s (950fps)	260 m/s(850 fps)
ENERGY	Joules	33.6	49.3	55.2
	ft. lbs	24.8	36.3	40.7
MAGAZINE CAPACITY		14	12	10
NUMBER OF SHOTS AT OPTIMAL VELOCITY (250 - 100BAR)		168	144	120
AIR TUBE VOLUME		425cc		
FILL PRESSURE		250 BAR		
STOCK		High Quality Synthetic Stock. Elevation Adjustable Cheek Rest Adjustable Butt Pad.		
OVERALL LENGTH		1010 mm (39.5")		
BARELL LENGTH		380 mm (18.9")		
WEIGHT		3.5 kg (6.6 lbs)		





(Scope not included)

* Velocity figures are tested with 8.44grain 177cal- 18.13grain 22cal and 25.39grain 25cal JSB pellets

* Velocity/Energy results may due to pellet weight, pellet shape, temperature, elevation, as well as other factors.



ACCESSORIES

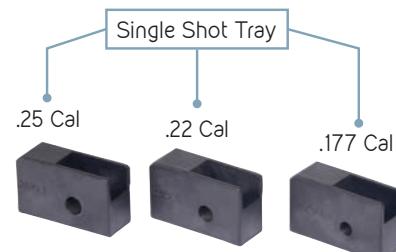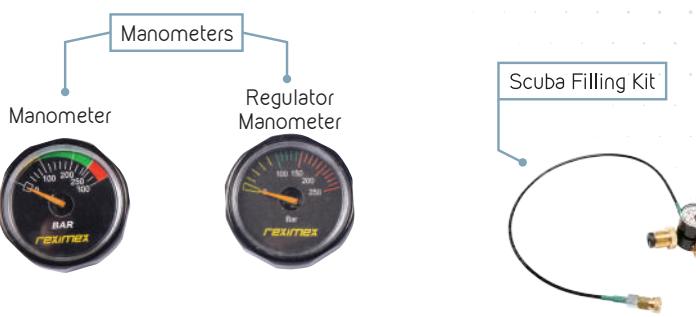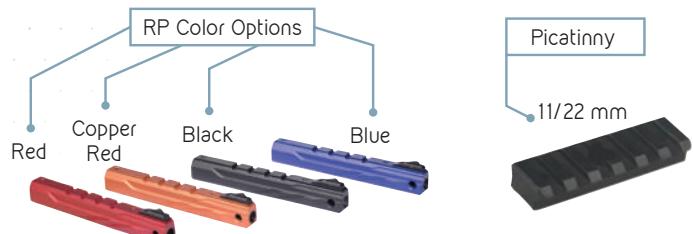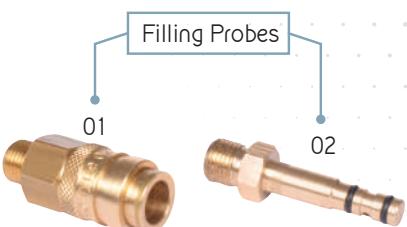



reximex

Dziękuję

GRACIAS TEŞEKKÜRLER DANKSCHEEN SPASIBO SPASIBO
ARIGATO SHUKURIA SHAKHALHYA NURUN
SHUKURIA MEASTAWHY GAEJTHO
JUSPAXAR TAVAPUCH MEDAWAGE BAINA
GOZAIMASHITA LAH KOMAPSUMUNIDA
EFCHARISTO AGUYJE FAKAUE
MAAKE ATTO MAAKE
GRAZIE DHAHYABAD WAEEJA MAITEKA
MEHRBANI PALDIES YUSPAGABITAN
THANK SUKSAMA EKHMET HUI
YOU UNALCHEEN HATUR
BOLZİN EKOAU SIKOMO
MERCI MAMONCHAR
SALAMAT MAKETAI
TINGKI BİYAN SHUKRIA

info@reximex.com



www.reximex.com



reximex

Factory Address: Beyşehir Organize Sanayi Bölgesi,
Bayavaş Mahallesi, 42700, Beyşehir / Konya / TÜRKİYE

T. +90 332 511 00 55

info@reximex.com